



SRAM 440

ROYAL ENFIELD

ENGINE

TYPE

Single cylinder, 4 stroke, SOHC, air-cooled, fuel injection

BORE X STROKE (IN MM)

81 x 86 mm

DISPLACEMENT

443 CC

FUEL INJECTION

Electronic Fuel Injection

COMPRESSION RATIO

9.5:1

IDLE RPM

1300 rpm

STARTING SYSTEM

Electric Start

MAXIMUM TORQUE

34 Nm @ 4000 rpm

CLUTCH

Wet Multi Plates

GEARBOX

6 Speed

LUBRICATION

Wet Sump

MAXIMUM POWER

25.4 Bhp (18.7 KW) @ 6250 rpm

ENGINE OIL GRADE

SEMI SYNTHETIC SAE 15W 50 API SL GRADE JASO MA 2



CHASSIS & SUSPENSION

TYPE

Half-Duplex Split Cradle Frame

FRONT SUSPENSION

Telescopic, 41 mm forks

FRONT WHEEL TRAVEL

190 mm travel

REAR SUSPENSION

Monoshock with linkage

REAR WHEEL TRAVEL

180 mm wheel travel

DIMENSIONS & WEIGHTS

WHEELBASE

1460mm

GROUND CLEARANCE

200mm

SEAT HEIGHT

795 mm

LENGTH

2165mm

WIDTH

840mm

HEIGHT

1170mm (without mirrors)

PAYLOAD WITH STANDARD EQUIPMENT

179 Kg

FUEL CAPACITY


15 L

DRY WEIGHT

187 Kg (Alloy / Spoke)

KERB WEIGHT (90% FUEL + OIL)

196 Kg (Alloy / Spoke)

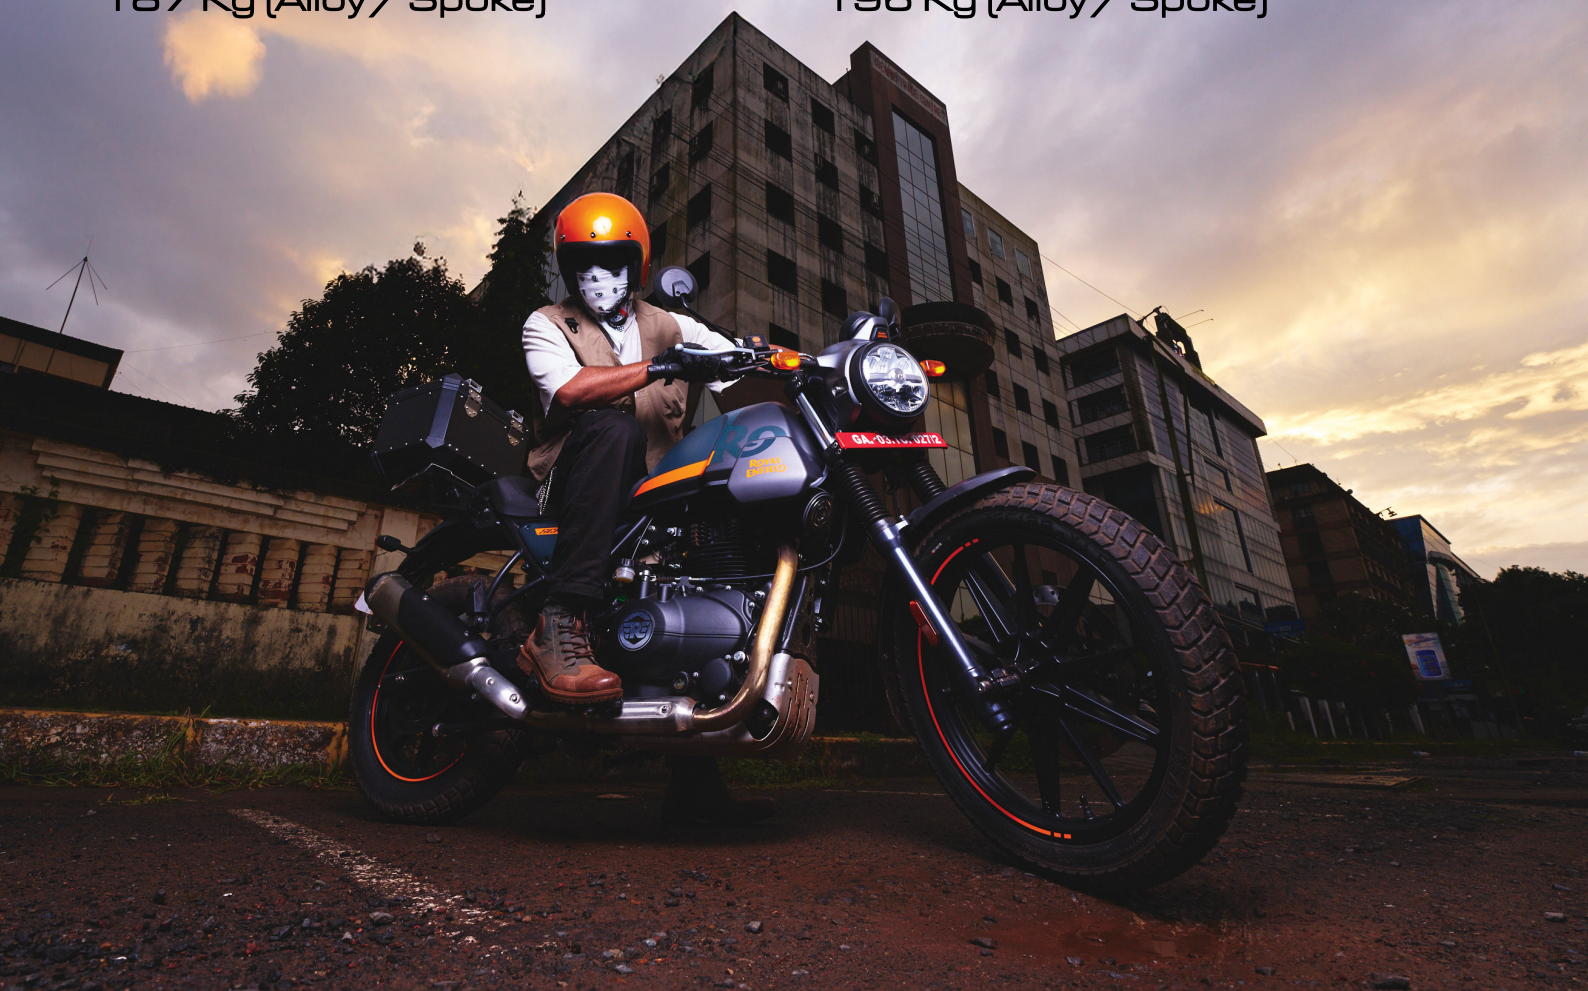

BRAKES & TYRES

WHEEL TYPE	TYRE TYPE	ABS
Spoke/Alloys	Tube/ Tubeless	Dual Channel, Swichtable at rear
TYRES FR.	TYRES RR.	
100/90 - 19" - dual-purpose tyres	120/90 - 17" - dual purpose tyres	
BRAKES FRONT		
Hydraulic Disc Brake 300mm disc, 2-piston floating caliper		
BRAKES REAR		
Hydraulic Disc Brake 240 mm disc, single piston floating caliper		

ELECTRICALS

ELECTRICAL SYSTEM	HEAD LAMP	TAIL LAMP
12 V	14/12W LED	LED
TURN SIGNAL LAMP	OTHER EQUIPMENT	CLUSTER
12V, 10W	USB Charger - Type A	Digital - Analogue cluster
NAVIGATION	BATTERY	
Tripper Pod (Optional)	12 V, 8 Ah Maintenance Free	





ROYAL ENFIELD