

ROYAL ENFIELD OWNER'S MANUAL

EURO V

ROYAL ENFIELD

METEOR
350

FOREWORD

Congratulations!

Now you are a part of an unparalleled heritage in motorcycling, owning a Royal Enfield, the world's oldest motorcycle marque in continuous production.

The Meteor is our new cruiser, easy on those long open highways, as it is in tight traffic situations. Fitted with our new 349 cc air-oil-cooled engine on a completely new frame, the motorcycle is designed for a more refined performance, confident handling & a comfortable ride, be it on long adventures or quick urban jaunts. A quintessential Royal Enfield, the Meteor, redolent with classic design cues, retains the signature exhaust note and gloriously blends timeless aesthetics with contemporary motorcycling needs.

This manual is to help you operate your motorcycle and guide you to maintain it in the right way. Please do avail all the services at your nearest Authorised Service Centre ensuring your motorcycle gets the care it is meant to. Do read through the terms and conditions of warranty and other useful information given in this manual before your fun ride begins.

Keep riding pure.

NOTICE

All information in this manual is based on the latest product information available at the time of publication. Due to continuous improvements, there may be discrepancies between the information in this manual and your motorcycle.

Royal Enfield reserves the right to make production changes at any time without prior notice and without incurring any obligation to make the same or similar changes to motorcycle previously built or sold.

All images shown are for reference to explain and need not to be exactly the same on the model you own. Technical specifications are subject to change without prior notice.

"© Copyright 2021 Royal Enfield (A unit of Eicher Motors Ltd.). All Rights Reserved. No part of this manual shall be copied, distributed or otherwise dealt without the express permission in writing from Royal Enfield".

Disclaimer

Following precautions are to be taken, to ensure longer paint life of your motorcycle.

1. Do not polish your motorcycle as it decreases gloss.
2. Wash only with plain water.
3. Scratches or marks cannot be removed or touched up.

Part No. RAM00316/A / Qty. / Mar. 2021 / 10134

CONTENTS

Safety Definitions.....	4	Parking	64
Personal and Motorcycle Information	5	Tools Kit	65
Safe Riding Tips / Guidelines	6	Minor Maintenance Tips	66
Rules of the Road	11	Rear Suspension Setting	79
Accessories and Luggage	14	Long Trip Precautions	82
Technical Specifications	17	Washing Procedure	83
Recommended Lubricants	23	Storage Precautions	86
Motorcycle Identification Numbers	24	Environment Care	87
Engine Number Details	25	Periodical Maintenance Chart	89
Location of Key Parts	26	Warranty Terms and Conditions	95
Operation of Controls	29	Emission Warranty	99
Warning Indications and Safety Systems	46	EVAP.....	107
Pre-Operational Checks	51	Wiring Diagram	109
Running in Period	52	Service / Maintenance Record	110
Starting	54	Notes.....	112
Gear Shifting, Riding and Stopping	59		

SAFETY DEFINITIONS

The information given under the titles: Warning, Caution and Note are for your safety and for the care and safety to your motorcycle and others. Please read these carefully and if disregarded may result in injury to yourself or others and damages to the motorcycle.



WARNING

Indicates a potentially hazardous situation. Disregarding this message may result in injury to rider or other persons.

CAUTION

This message, if disregarded, may result in damage to the motorcycle.

NOTE

Indicates important and useful messages for better understanding.

PERSONAL AND MOTORCYCLE INFORMATION

Name		
Door No./Street		
Locality/Town		
City		Country
Contact	Res :	Off :
	Mobile :	Email :
Licence No.	Valid till :	
Model	Color :	
Engine No.		
VIN. No.		
Tyre make	Front :	Rear :
Tyre Nos.	Front :	Rear :
Battery make		Battery No.
Sold by		
Date of Sale		

SAFE RIDING TIPS / GUIDELINES

- Before operating your new motorcycle, we request you to carefully read and follow the operating and maintenance instructions detailed in this manual for the safety of your own, your motorcycle and also that of others.
 - Know and adhere to the rules of the road with respect to your driving country.
 - Before starting the motorcycle, check for proper operation of brakes, clutch, gear shifter, handle bar controls, tyre pressures, fuel and oil levels, etc.
 - Use only genuine Royal Enfield spare parts and approved accessories. Use of other manufacturer's parts may affect the performance of your motorcycle and render the motorcycle void of warranty.
- Visit your Royal Enfield Authorised Service Centre for details.
- Whenever refueling your motorcycle, please exercise utmost caution and carefully observe the following guidelines.
 - ★ Refuel in a well ventilated area with the engine turned off condition.
 - ★ Open the fuel tank cap slowly.
 - ★ Switch "OFF" mobile phones and other hand held electronic devices.
 - ★ DO NOT smoke and please ensure that there are no open flames or sparks near the motorcycle, when refueling or servicing the fuel system.

SAFE RIDING TIPS / GUIDELINES

- ★ DO NOT fill the fuel in tank to its brim. Please fill fuel till the bottom of anti splash plate, so as to leave sufficient air space in the fuel tank to allow for fuel expansion.



WARNING

Royal Enfield cautions you against the use of certain nonstandard parts such as aftermarket and custom made extended front forks or suspensions, which may adversely affect performance and handling. Removing or altering original parts may adversely affect performance and could result in accident.

- A new motorcycle must be operated according to the special running-in-procedure. See running-in-procedure mentioned in respective section.
- Operate motorcycle only at moderate speeds and out of traffic until you have become thoroughly familiar with its operation and handling characteristics under all conditions.
- DO NOT exceed the legal speed limit or ride too fast for existing conditions. Always reduce speed when poor riding conditions exist. High speed increases the influence of any other condition affecting stability and increases the possibility of loss of control.

SAFE RIDING TIPS / GUIDELINES

NOTE

If you are an inexperienced rider we recommend that you obtain formal training on correct motorcycle riding techniques and become thoroughly familiar with the operation of your motorcycle. New riders should gain experience under various conditions while driving at moderate speeds.

Pay strict attention to road surfaces and wind conditions. Any motorcycle may be subject to the following up-setting forces:

- ★ Wind blasts from passing vehicles.
- ★ Rough or uneven road surfaces.
- ★ Slippery road surfaces.

These forces may affect the handling characteristics of your motorcycle. If this happens, reduce speed of the motorcycle to a controlled condition. Do not apply brake abruptly.

- Operate your motorcycle defensively. Remember that a motorcycle does not afford the same protection as an automobile in an accident. One of the most common accident situations occurs when the rider / driver of the other motorcycle / vehicle fails to see or recognise a motorcycle and turns into the oncoming motorcyclist.
- Wear an approved helmet, clothing and footwear suited for riding a motorcycle. Bright / light colours are best for greater visibility in traffic, especially at night. Avoid loose, flowing garments and scarves.

SAFE RIDING TIPS / GUIDELINES

- When carrying a pillion rider, it is your responsibility to instruct them on proper riding procedures.
- DO NOT allow other individuals, under any circumstances, to operate your motorcycle unless you know they are experienced, licensed riders and are thoroughly familiar with the operating conditions of your motorcycle.
- For your personal welfare, all the listed service and maintenance recommendations should be performed. Lack of regular maintenance at the suggested intervals may affect the safe / durability / longevity operation of your motorcycle.
- Avoid any contact with the exhaust system when hot. Wear clothing that will completely cover the legs while riding. The exhaust system gets very hot when the engine is running and remains too hot to touch, even after the engine is turned off. Failure to wear proper or protective clothing could result in serious injury.
- Exhaust gas contains poisonous carbon monoxide and chemicals, known to cause cancer, birth defects or other reproductive defects.



WARNING

- Regularly inspect shock absorbers and front forks and look for leaks. Replace worn out parts. Worn out parts can adversely affect stability and handling.

SAFE RIDING TIPS / GUIDELINES



WARNING


- Motorcycle batteries contain lead, acids and chemicals known to cause cancer, birth defects or other reproductive harm. Exercise extreme caution while handling a battery, wash hands thoroughly whenever a battery is handled.
- Consult your Royal Enfield Authorised Service Centre regarding any questions or problems that occur in the operation of your motorcycle. Failure to do so may aggravate an initial problem, cause costly repairs and jeopardize your personal safety.
- DO NOT tow a motorcycle. The steering and handling of the towed motorcycle will be impaired due to the force of the towline. If a motorcycle must be transported, use a truck or a trailer.
- DO NOT pull a trailer behind a motorcycle. Towing a trailer may cause reduced braking efficiency, tyre overloading and unstable handling, as it may cause loss of control of the motorcycle in the front, leading to an accident.

RULES OF THE ROAD

- Be sure your number plate is installed in the position specified by law and it is clearly visible at all times.
- Ride at a safe speed that is consistent with the type of road surface you are on. Pay strict attention while riding on the following surfaces :
 - ★ Dusty
 - ★ Oily
 - ★ Icy
 - ★ Wet
 - ★ Sand
- Watch for loose debris, such as leaves, slippery substances or gravel that can hamper the stability of your motorcycle.
- Keep to the correct side of the road center line, when meeting oncoming vehicles.
- Actuate your turn signals and exercise caution when passing other vehicles going in the same direction. Never try to pass another vehicle going in the same direction at street intersections, on curves, or when going up / or down a hill.
- At street intersection give the right-of-way to the motorcycle on your left or right. DO NOT presume you have the right-of-way.
- Adhere to the rules of the road with respect to your country when preparing to stop, turn or pass. While turning either right or left, watch for pedestrians, animals, as well as other vehicles.

RULES OF THE ROAD

- All traffic signs, including manual controls at intersections, should be obeyed promptly. SLOW DOWN at traffic signs near schools and CAUTION signs at rail road crossings.
- When intending to turn, signal at least 100 feet (30.5 meters) before reaching the turning. Be close to the center line (unless local rules require otherwise), slow down and then turn carefully.
- Never jump a traffic light. When a change is imminent from GO to STOP (or vice versa) at intersections,




slow down and wait for the light to change to green. Never run through a yellow or red traffic light.

- DO NOT leave the curb or parking area without signaling. Be sure your way is clear to enter moving traffic. A moving line of traffic always has the right-of-way.
- When parking the motorcycle, park on a firm and flat surface to prevent it from falling over.
- Protect your motorcycle against theft. After parking your motorcycle, ensure that the steering head is locked and then remove the ignition key.

RULES OF THE ROAD

SIDE VIEW MIRRORS



Your motorcycle is equipped with convex mirrors and have a curved surface. This type of mirror is designed to give a much wider view of the rear than a normal flat mirror. However, vehicles and other objects seen in this type of mirror will look smaller and farther away than when seen in a flat mirror.

Use care when judging the size or distance of vehicles / objects seen in these mirrors.

NOTE

To establish the relative distance of vehicles / objects behind your motorcycle through the mirrors, adjust each mirror in such a way, that a small portion of your shoulder is visible and a large portion behind your motorcycle is seen clearly with reference to your riding posture.

ACCESSORIES AND LUGGAGE

Royal Enfield offers a range of genuine motorcycle accessories that have been fully approved and extensively tested alongside the motorcycle.

Therefore, the rider must be responsible for safe operation of the motorcycle when installing accessories or carrying additional weight.

Please adhere to the following guidelines when carrying a pillion, luggage or when fitting any accessories.

- DO NOT exceed 110km/h / 70 mph when riding solo, carrying a pillion or payload on an accessory equipped motorcycle.
- Keep luggage weight concentrated close to the motorcycle and as low as possible; this minimizes sudden shift in the motorcycle's center of gravity.
- Distribute weight evenly on both sides of the motorcycle.
- DO NOT load bulky items behind the rider or add weight to the handlebars or front forks.
- DO NOT exceed 6.6 pounds (3 kgs) maximum weight in each Royal Enfield Genuine motorcycle accessory pannier.
- Re-check the luggage periodically to ensure it is secured and will not shift while riding. Accessories mounted loosely may affect the riding of the motorcycle and affect the handling and stability of the motorcycle.
- Large surfaces such as fairings, windshields, backrests and luggage racks can adversely affect handling of the motorcycle. Use Royal Enfield genuine motorcycle accessories which are model specific and follow installation procedure.

ACCESSORIES AND LUGGAGE



WARNING

- DO NOT load weight or install accessories incorrectly on the motorcycle. Doing so may affect the motorcycle's stability, handling characteristics and safe operation and could result in an accident causing serious injury or loss of life.
- Royal Enfield offers a range of genuine motorcycle accessories that have been fully approved and extensively tested alongside the motorcycle.
- Royal Enfield cautions you against use of non-standard parts such as aftermarket and custom made extended front forks which may adversely affect the performance and handling of the motorcycle. Removing or altering original parts may adversely affect the performance of the motorcycle, causing an accident, which could result in serious injury or loss of life.
- DO NOT ignore model / design specifications. Doing so constitutes both motorcycle and accessories misuse which may adversely affect the handling and performance of the motorcycle causing an accident, which could result in serious injury or loss of life.
- Total weight and axle loads influence the handling characteristic of the motorcycle.
- The total weight consists of the following:
 - a. motorcycle ready for operation and with a full tank,

ACCESSORIES AND LUGGAGE

- b. Rider
 - c. Passenger
 - d. Protective clothing and helmet,
 - e. Luggage / accessories.
- Do not exceed the maximum permissible overall weight or the axle loads.
 - If your motorcycle is equipped with saddlebags, a windshield or a passenger backrest, be prepared to reduce operating speed to maintain stability.



WARNING

- A high payload alters the handling characteristic and increases the stopping distance of the motorcycle.
- Riding off-road, riding with more than one passenger, or carrying weight exceeding the maximum weight rating can make handling difficult, which may cause loss of control of the motorcycle which may cause injury to the rider.

TECHNICAL SPECIFICATIONS

ENGINE

Engine Type & Emission	Single Cylinder & BS VI
Bore x stroke.....	72 mm
Stroke	85.8 mm
Engine capacity (cc)	349.34 cc
Compression ratio	9.5:1
Max Power	14.87 kW @ 6100 rpm
Max Torque	27 Nm @ 4000 rpm
Idle RPM	1050 ± 100 rpm
Starting	E-Start
Air filter element	Paper element

Lubrication oil	SAE 15W 50 API SL Grade JASO MA2 Semi Synthetic Oil
Engine oil capacity	2.20 Litres

IGNITION SYSTEM

Ignition Type	ECU controlled (with ECU map number)
Spark plug gap	0.7 to 0.8 mm
Spark plug	M12 Bosch, YR7MES

TECHNICAL SPECIFICATIONS

TRANSMISSION

Clutch	Convention Wet clutch	Final drive	Chain
Primary drive	Gear	Secondary Sprocket Ratio .	2.800:1
Primary ratio	2.313	Drive Chain links	104 links
Gear box	Constant Mesh		
Gear Ratio	1 st 2.615		
	2 nd 1.706		
	3 rd 1.300		
	4 th 1.040		
	5 th 0.875		

TECHNICAL SPECIFICATIONS

CHASSIS

Frame	Twin Downtube Spine Frame	Rear Disc	270 mm disc, single piston floating caliper	
Suspension		ABS	Dual channel	
Front	Telescopic, 41 mm forks, 130 mm travel	Tubed and Steel Rim	Standard Tyre	Replacement Tyre : Replace with Standard Tyre or below mentioned Tyre
Rear	Twin tube Emulsion shock absorbers with 6 step adjustable preload	Front	Make, Type : CEAT Size : 100/90-19 M/C 57P	Make, Type : Metzeler Size : 100/90-19 M/C 57V
Brakes		Rear	Make, Type : CEAT Size : 140/70-17 M/C 66P	Make, Type : Metzeler Size : 140/70-17 M/C 66H
Front Disc	300 mm disc with twin piston floating caliper.			

TECHNICAL SPECIFICATIONS


CHASSIS

Tyre Pressure		Fuel Type	Petrol,
Solo			upto E10 minimum
Front	32 PSI	Fuel tank capacity	15 ± 0.5* Litres
Rear	32 PSI	Minimum Octane Rating ...	91 RON
With Pillion		Low fuel warning	5 ± 0.5 Litres (Including Dead Stock)
Front	32 PSI	Fuel Dead Stock	950 ml ± 50 ml
Rear	36 PSI		
Steering lock	Integrated with ignition lock		

*The above values are approximate and the actual fuel filling capacity will vary from the values mentioned.

TECHNICAL SPECIFICATIONS

ELECTRICALS

Generation	Alternator (ACG)	Turn signal	12V, 10W X 2 nos
Battery	12V - 8Ah VRLA (maintenance free)	Horn	Single tone - K95 - 2.5 A
Starter motor	12V - 0.7 kW	Charger Port	USB 2.0 Type A - 5V 2A output
Head lamp	12V, H4-60/55W (Halogen) with LED light guide	Hazard signal	12V, 10W x 4 nos
Position lamp	LED - 13.5V-1.3W	<div>WARNING Using bulbs / other electrical gadgets other than specified rating may lead to over loading / erratic behaviour / premature failure of electrical system. Modifications on the motorcycle which are not approved by Royal Enfield may not only disqualify for warranty, but also affects performance of the motorcycle.</div>	
Brake / Tail lamp	12V, 13.5V, LED type 2.8 / 1.4-W		
Speedometer lamp	12V - LED		
Hi-beam indicator	12V - LED		
Neutral lamp tell tale	12V - LED		
Turn signal tell tale	12V - LED		

TECHNICAL SPECIFICATIONS

DIMENSIONS

Length	2140 mm
Width	845 mm
Wheel base	1400 mm
Ground clearance	170 mm
Total height	1. 1140 mm* 2. 1310 mm* (Windshield) * Mirrors are excluded for Height measurement.
Saddle Height	765 mm

WEIGHTS

Kerb weight (90% fuel)	191 kg
Gross Vehicle Weight	375 kg

NOTE

- Values / dimensions given above are for your guidance only.
- In view of continuous improvements being done on our products, the specifications are likely to change without prior notice.
- Do not use the vehicle beyond the allowed Gross weight. The suspensions and tyres are designed to perform only to the maximum gross vehicle weight.

RECOMMENDED LUBRICANTS

Engine Oil		Front Fork Oil		Brake Fluid	
Grade	SAE 15W 50 API SL Grade JASO MA2 Semi Synthetic	Grade	Royal Enfield Fork Oil	Grade	DOT 4 or above
Capacity	Refill : 1.7 Litres (Approx.) Dry fill : 2.2 Litres (Approx.)	Capacity	453 cc	Capacity	Front : 87 ml Rear : 54 ml

* DO NOT mix DOT 4 & other brake fluids together.

CAUTION

Use of wrong grade / mixed grade oil will reduce the life of the moving parts and seriously affect performance.

NOTE

Recommendation subject to change without notice.


MOTORCYCLE IDENTIFICATION NUMBERS

The VIN is a 17 digit number punched on the right side steering head tube in the form of label.

Sample VIN : ME3 D J EM T 5 X X XXXXXX

Manufacturer's code	_____
Type of Frame	_____
Type of Engine	_____
Commercial Name	_____
Ignition System	_____
Transmission Type	_____
Production Year (2020:L, 2021:M, 2022:N)	_____
Assembly factory (K - Kanchipuram (Oragadam) V - Vallam Vadagal)	_____
Production Serial No.	_____

FRAME NUMBER




ENGINE NUMBER - DETAILS


Identification of the engine serial number and its production details. It is illegal to tamper with the engine number as it is the only means of identifications of the engine.

	J	3	A	5	F	X	X	2	XXXXXX
Engine Family									
Engine Capacity									
Type of Cooling									
Type of Transmission									
Type of Fuel system									
Production Month									
(A - Jan., h - Aug., K - Sep., N - DEC.)									
Year of Manufacturing									
(2020:L, 2021:M, 2022:N)									
Manufacturing Plant									
(1-Oragadam, 2-Vallam Vadagal)									
Production Serial Nos.									


ENGINE NUMBER



LOCATION OF KEY PARTS

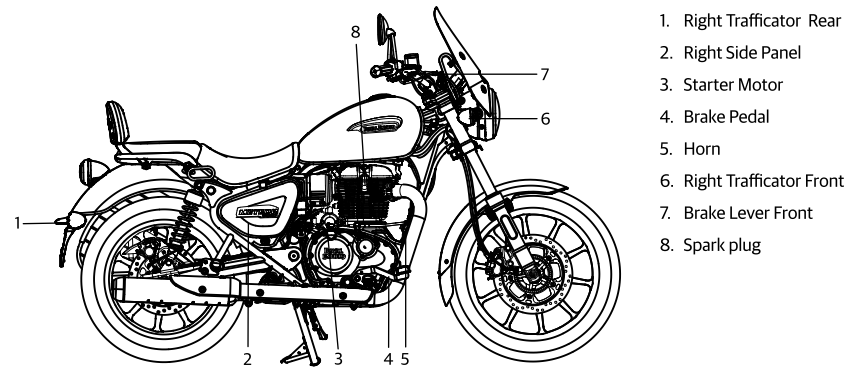

LOCATION OF KEY PARTS

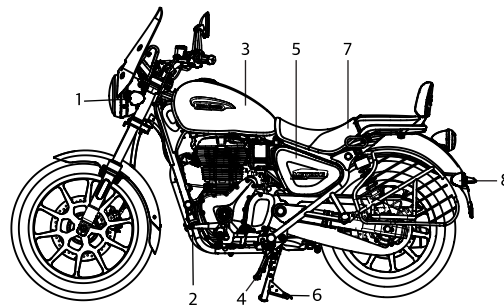


1. Left Trafficator Front
2. Gear Change Pedal
3. Fuel Tank*
4. Side Stand
5. Left Side Panel
6. Center stand
7. Seat*
8. Left Trafficator Rear

DISCLAIMER

* The part displayed above are for reference purpose only. This will vary from the parts chosen using motorcycle configurator.

LOCATION OF KEY PARTS

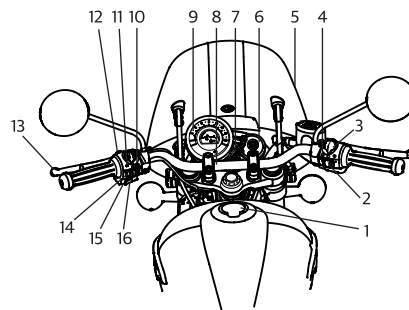

1. Fuel Tank Cap
2. Hazard Switch
3. Engine Kill switch
4. Electric Start Switch
5. Wind shield
6. Tripper
7. Ignition Switch
8. Handle bar*
9. Instrument Cluster
10. Day Flash Switch
11. High Beam / Low Beam Switch
12. Info button
13. Clutch Lever
14. Turn Signal Switch
15. Charger Port
16. Horn Button


DISCLAIMER

* The part displayed above are for reference purpose only. This will vary from the parts chosen using motorcycle configurator.

OPERATION OF CONTROLS


IGNITION SWITCH

- ⊗ OFF
- ON



STEERING LOCK


- Turn the handle bar to extreme left position.
- Push the key inside in "OFF" position, press and further turn to anticlockwise direction to lock the steering system.
- Turn the key in the clockwise direction to unlock the steering.



OPERATION OF CONTROLS

FUEL TANK CAP

- Turn key clockwise to open.
- Press cap to lock with key in position.



WARNING

- DO NOT overfill the fuel tank.
- Fill fuel only till the bottom of anti splash plate.
- Over filling may result in gasoline entering the EVAP canister and may damage the Evaporative Emission System.

CAUTION


Gasoline vapour is highly explosive. Please ensure there are no open flames or sparks nearby while refueling and fill fuel only in a well ventilated area.

Please ensure gasoline does not spill on painted surfaces. In case fuel spills over the painted surfaces wipe it off immediately as it may leave a permanent stain.

Do not smoke while refueling or when fuel tank cap is open.

OPERATION OF CONTROLS

FUEL TANK

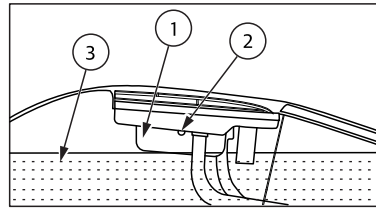

1. Fuel Tank Mouth
2. Splash Arrestor
3. Maximum Fuel level

WARNING

Do not overfill the fuel tank. Fill upto maximum fuel level & stop filling when the fuel reaches the bottom of splash arrestor. Failure to do so will lead to canister damage or can cause fuel spill out of fuel tank.


Petrol is highly explosive. Please ensure there are no open flames or sparks nearby while refueling and fill fuel tank only in a well ventilated area.

Please ensure petrol does not spill on painted surfaces. Wipe immediately incase fuel spills over as otherwise it will leave a permanent stain on the painted surfaces.

OPERATION OF CONTROLS


ENGINE STOP SWITCH

- ⊗ Engine "OFF"
- Engine "ON"



E-START SWITCH

- ⓘ Push and hold electric start switch until engine starts for a maximum of 5 seconds.




CAUTION

- In case of prolonged stoppage of vehicle, please turn off ignition key to avoid discharge of battery.

OPERATION OF CONTROLS


DIGITAL INSTRUMENT CLUSTER

1. Digital display with analog speedometer with 3D trim ring
2. Speedo indication with stepper motor
3. Round segmented floating LCD
4. 8 - LED based tell tales
5. Display features
6. Odometer
7. Trip A and Trip B
8. Trip F
9. Fuel bar graph
10. Gear indication
11. ECO mode
12. Service reminder
13. Clock



OPERATION OF CONTROLS

INSTRUMENT CLUSTER DISPLAY PATTERN

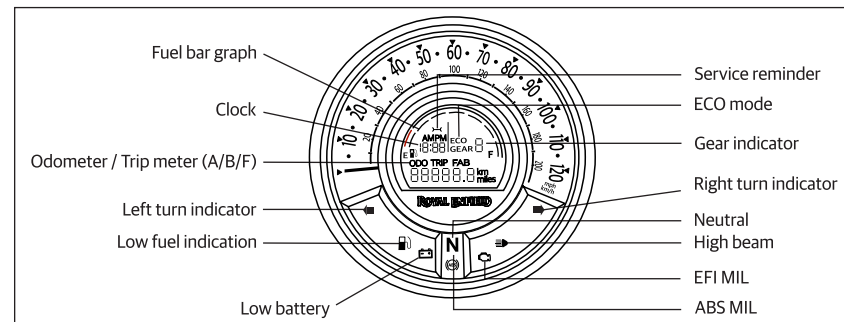

OPERATION OF CONTROLS


LCD FEATURES

- Fuel gauge:
 - Digital with 7 segment bar graph.
 - Last segment blinking along with low fuel tell tale "ON" for low fuel condition.
- Service reminder :
 - In case service reminder symbol is "ON" please plan for a scheduled service at an authorized service centre.
- Trip F:
 - Distance driven after low fuel tell tale is "ON".
 - Cannot be re-set.
- ECO Mode:
 - Will be visible only when low fuel condition is sensed, will vanish if fuel is filled above low fuel condition.
 - Display can be toggled using info button during this condition but will auto appear after 25 secs Linked with stand switch to avoid re-set when in side stand condition.
 - If ridden > 200 kms in Trip F condition "Low Fuel" will flash continuously on LCD. It is recommended not to ride vehicle in these condition as it will result in fuel pump damage.
 - Indicated when driven under optimum conditions.

OPERATION OF CONTROLS

INFO BOTTON MANAGEMENT DETAILS


A. LCD
SEQUENCE
(Info
switch
press <1
sec.) :-
If Trip F
enabled



With Trip F



If Trip F
not enabled



Without Trip F



NOTE

- For trip re-set press info button for T>3 secs.


OPERATION OF CONTROLS

CLOCK SETTING PROCEDURE

Function	Switch	Pressure Time (Secs)	Action
Clock Setting	Info	Press and hold INFO switch for 3 seconds and release	In Ign ON and current display in ODO mode and no speed input (safety), press info button for specified time to enter into clock setting mode (hours will blink)
	Info	Press and release INFO switch	Hours in the clock will increase
	Info	Press and hold INFO switch for 3 seconds and release	Setting changes to minutes (minutes will blink)
	Info	Press and Release INFO switch	Minutes in the clock will increase
	Info	Press and hold INFO switch for 3 seconds and release	Setting changes to unit mode (AM/PM will blink)
	Info	Press and Release INFO switch	Toggle between AM or PM
	Info	Press and hold INFO switch for 3 seconds and release	Save data and exit clock setting mode

OPERATION OF CONTROLS - TRIPPER

TRIPPER

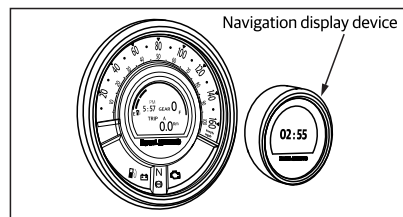

Trippler is being provided to have turn by turn Navigation on motorcycle to help riders to have a hassle free riding without handling the smartphones, This device works

based on Bluetooth connectivity with navigation search based on RE Mobile app with the support of Google Maps.

Device is capable of showing turn by turn navigation on a custom designed round color TFT with uniquely designed arrow font designed intuitively for ease of riding.

Background display can be switched between day mode and night mode which can be selected by riders from RE Mobile app.


OPERATION OF CONTROLS - TRIPPER

Features:

- Turn by turn navigation with primary turn, secondary turn.
- Distance to next turn, distance to destination or Estimated Time of Arrival (ETA).
- Clock display (in case of no connectivity, no navigation input or after destination is reached).
- User can select day and night mode (through RE mobile app only).
- Mobile Phone low battery indication.

DISCLAIMER

Trippler unit display may look dull during sun overhead conditions this is normal and due to impact of direct sunlight on the unit customers to refer during other riding conditions.

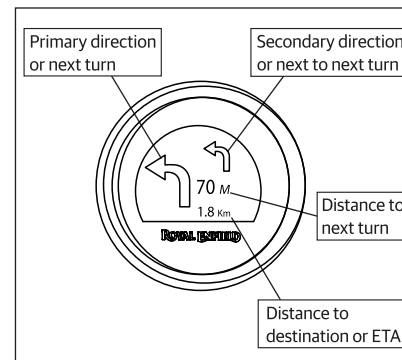

OPERATION OF CONTROLS - TRIPPER

- Primary direction or next turn: Indicates the next turn to be taken along with the distance.
 - Distance to next turn: Shows the distance to next turn.
 - Secondary direction or next to next turn: Indicates the next turn to be taken after the primary direction, will be shown only when primary turn is less than 100 mts, if there is no turn the display will be blank in this region.
 - Distance to destination or ETA: Shows the total distance to destination or estimated time of arrival (based on user selection from RE Mobile app).
- Smartphones compatible version to use RE Mobile app:**
 - Compatible with Android and iOS.
 - Android support: Current version (-2).
 - iOS support: Current version (-1).
 - Connectivity control only through RE Mobile app.

TRIPPER - DISPLAY FLOW SEQUENCE



OPERATION OF CONTROLS - TRIPPER

NOTE

- After every Ignition "ON" cycle tripper will be in discoverable mode for 120 secs.
- In case there is no connection established within 120 secs. display will enter into clock mode, to re-initiate connection Ignition "OFF-ON" cycle to be repeated.
- During Navigation mode if there is no input from smartphone for 5 secs, Bluetooth connection will be terminated to avoid power draw and will display clock.
- Bluetooth connection can be terminated by end user also by closing the mobile application.
- For first time pairing user needs to enter the secured pin shown on tripper through RE Mobile app to setup the device, after that auto-pairing will happen if same device is connected.
- Everytime the tripper is paired the clock time will sync with mobile time after which it will continue to run with internal clock even in case of disconnection, there will be time difference between time shown on instrument cluster and tripper - customer needs to update cluster clock inline with time shown on tripper as and when required as mentioned in push button management of cluster.
- Do not apply or use gasoline / petrol related fluids for cleaning or wiping on instrument cluster or Tripper, as it may result in permanent damage to the same.

OPERATION OF CONTROLS - TRIPPER


CAUTION

- Ensure ignition is "ON" and display is in powered while establishing connection.
- Ensure first time pairing is done in isolated environment to avoid cross connections (one time).
- Day and night mode is user selectable only, will not change over automatically to be selected during night driving to avoid rider distraction.
- Bluetooth connection can be established only through RE Mobile app.
- Ensure bluetooth and location settings are turned always "ON" before usage.
- Disable battery optimisation settings / low battery cut-off setting of smartphone for Navigation to work in low battery mode.
- RE Mobile app works only with Android Current version (-2) and iOS Current Version (-1) versions, for other lower versions performance lag can be expected.
- Tripper Bluetooth version is V4.2.
- RE Mobile app works with bluetooth version 4.2 and N+1.0, for other lower versions performance lag can be expected.
- Check for network signal strength in case of navigation lag.
- Check for data speed in case of navigation lag, Navigation system performance is better in 4G band compared to other lower versions.
- Calibrate mobile phones frequently for more GPS accuracy & location accuracy is dependent on.

OPERATION OF CONTROLS

CHARGER PORT

Charger Port is located on Left side handle bar beneath the turn signal switch.



WARNING

- Recommended not to use in rainy conditions to avoid damages to smart phones and charger, RE shall not be liable for any damage to smart phones.
- Do not use any other device other than mobile phones, only one mobile shall be charged at one point of time.
- Ensure proper insertion of USB cable, damages due to hard / wrong insertion of cable will not be entertained in warranty.
- Do not leave the USB port cap partially opened / closed to avoid any short circuit when not in use.
- Do not insert any metal or conductive materials inside USB charging port which may lead to short circuit.

OPERATION OF CONTROLS

NOTE

- Charging port is provided only for charging purpose and no data transfer is enabled.
- Provided is only constant charging mode, fast / dash charging is not provided to be compatible with multiple make mobile phones and cannot be compared with performance of original smart phone chargers.
- Duration of charging can be higher and will vary for different make mobile phones depending on smart phone battery capacity, SoC and smart phone charging circuits.

CAUTION


- Customer to ensure USB port cap is closed and locked properly when not in use, warranty will not be provided if port cap is damaged and not sealed properly.
- If high current draw greater than 2.5 ampere is observed USB charger will shutdown please check your smart phone battery current ratings before using.
- USB charger will function only when engine is in running condition.
- Use standard approved and high quality USB cables for proper functioning.

WARNING INDICATIONS AND SAFETY SYSTEMS

ANTI-LOCK BRAKING SYSTEM (ABS)

Anti-Lock Braking System (ABS) will help prevent the brakes from locking the wheels, during sudden application of the brakes at high speeds or at low friction surfaces. This will help the rider to have better traction and control over the motorcycle and prevent the motorcycle from skidding which can cause an accident.

In the event of a sudden and hard application of the brakes by the rider, the sensors in the braking system will signal the ABS modulator to momentarily and continuously reduce the hydraulic pressure and thereby prevent the brakes from locking the wheels while



reducing the speed of the vehicle. This will help the rider to control the motorcycle.

An ABS indicator lamp is provided in the cluster (as shown in the adjacent image) to warn the rider in the event of any malfunction of the ABS.

When the ignition and engine kill switch are switched in "ON" position the ABS sign will glow and remain "ON" till the motorcycle attains a speed of 5 kmph / 3 Mph and turns "OFF". This indicates the ABS is functioning properly. If the ABS indicator lamp does not switch "OFF" and remains continuously "ON" at higher speeds, it is recommended not to drive the ABS motorcycle. Get the brake system inspected and corrected through a nearest authorised Royal Enfield Service Centre. Failure to do so can result in a serious injuries and loss of life.

WARNING INDICATIONS AND SAFETY SYSTEMS

CAUTION (ABS)

ABS is a safety feature to help prevent locking of wheels during panic application of brakes. It is by no means a substitute for good riding practices and anticipatory braking.

Please ride carefully and apply brakes cautiously, especially while cornering. ABS cannot estimate the "weight shifts" and momentum of the motorcycle while negotiating a corner and therefore prevent skidding due to loss of traction.

Please anticipate the stopping distance required for the speed of travel and apply brakes well in advance so as to bring the motorcycle to a safe stop.

Ensure instrument cluster is in proper functioning as it is an integral part of ABS system.

Please apply both brakes simultaneously to stop with better traction and control of the motorcycle.

Failure to adhere to the above can cause an accident resulting in serious injuries and loss of life.

WARNING INDICATIONS AND SAFETY SYSTEMS




WARNING

- Always use the approved front / rear tires and sprockets by Royal Enfield to ensure correct ABS operation.
- Do not make any changes to the suspension travel.
- Only use recommended spare parts on the brake system which have been approved by Royal Enfield.
- ABS does not reduce braking distance. In certain circumstances, ABS may result in a longer stopping distance.

CAUTION (ABS)

- Visually inspect for damaged teeth on the front and rear ABS tone rings.
- Inspect for damages and dents on the face of the teeth.
- The teeth edges should be consistent in appearance. In case if a toner ring is found to be damaged or bent, it is recommended to visit nearest dealership for necessary action.
- Inspect for debris at the end of the wheel speed sensors – front & rear, if contamination is observed, it is recommended to clear it suitably or you may visit to nearest dealership for necessary action.



WARNING INDICATIONS AND SAFETY SYSTEMS

DO'S AND DON'TS : (ABS)

DO'S	DON'TS
<ul style="list-style-type: none">■ While starting the engine do check the ABS indicator glows "ON" and turns "OFF" when the vehicle speed exceeds 5 km/h (3.1 mph).■ Please check the brake fluid at "MAX" level in the front and rear brake reservoir and ensure there is no leak in the brake systems.■ Apply both the brakes simultaneously for better efficiency.■ In the event of the ABS indicator remaining continuously "ON", please take the motorcycle to a nearest authorised Royal Enfield Service Centre to inspect the brake system.	<ul style="list-style-type: none">■ DO NOT RELEASE the brake lever / pedal when pulsations are felt during hard application of the brakes in an emergency situation. The pulsations only indicate that the ABS is activated.■ DO NOT APPLY only the front OR rear brake as it can lead to inefficient braking.

WARNING INDICATIONS AND SAFETY SYSTEMS

ROLL OVER SENSOR

In the event of motorcycle falling over on either of its sides with the engine running and the gears engaged the Roll over sensor will "disable" fuel systems and switch "OFF" the engine. This is to prevent any damage to the motorcycle and its rider. To reset the Roll over sensor and reactivate the fuel systems.

- Ensure the motorcycle is made upright and is on its center stand.
- Ensure gears are in correct neutral and the neutral lamp is glowing in the instrument console.
- Switch "OFF" both ignition & stop switches, wait for a few seconds and switch "ON" the Ignition and stop switch again, to start the engine.

PRE OPERATIONAL CHECKS

A careful check of the following must be carried out every time before riding and specially after long periods of storage to determine if any additional maintenance is necessary.

1. Adequate fuel in the tank.
2. Tyres for correct pressure, abrasions or cuts.
3. Rear chain for proper tension and sufficient lubrication.
4. Brakes, steering and throttle for proper responsiveness.
5. Cable for fraying or crimping and free operation.
6. Engine oil level.
7. Alloy wheels for proper tightness.
8. Headlamp, tail lamp, brake lamp and indicator lamps for proper functioning.
9. Smooth operation and free play in front and rear brake levers.
10. Brake fluid level is above the "MIN" mark in the master cylinder.
11. Ensure the clutch free play and clutch friction.



WARNING

For your personal welfare and safety, all the points mentioned above should be performed periodically. Failure to do so may affect safe operation, damage your motorcycle and could result in an accident causing serious injury.

RUNNING IN PERIOD

The Royal Enfield motorcycle as you would be experiencing is capable of consistent high speeds. However as with any new motorcycle, a "RUNNING-IN" procedure is essential to help in proper "Bedding-In" of the various moving parts in your motorcycle and to achieve optimum performance like gear shifting subsequently.

1. DO NOT exceed maximum specified pay load.
2. Warm up the engine for a few minutes at idling speed to allow engine oil to lubricate all the moving parts in the engine before riding the motorcycle.
3. Avoid full throttle operation and do not ride at constant throttle continuously. Vary the speed by 10% while riding.
4. Ride at proper speed and avoid sudden accelerations and braking.
5. Avoid riding motorcycle continuously for over an hour, it is recommended to take brief stop.


RUNNING IN PERIOD

NOTE


During the running-in period, do not exceed following speed limits.


Gear	Motorcycle speed	
	First 500 kms (kmph)	501-2000 kms (kmph)
1	20	25
2	30	35
3	45	50
4	60	65
5	70	80

STARTING

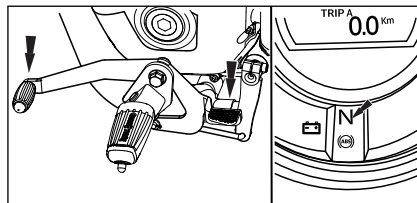


- To shift into neutral, move the motorcycle back and forth gently, while simultaneously shifting the gear. Ensure gear is in neutral position and the neutral lamp is glowing in the instrument cluster.

- Turn ignition key to "ON" position and engine kill switch on right hand side handle bar to "RUN" position .




STARTING

- Engine kill switch is in "ON" position, the MIL will glow continuously and after the vehicle is started, the MIL will turn "OFF" in few seconds, this indicates that all the function of the electronic fuel injection (EFI) system is functioning normally. In the event of any malfunction in the EFI system the MIL will glow continuously.




CAUTION

- In case the malfunction indicator DOES NOT turn "OFF", get the motor-cycle checked through an Royal Enfield Authorised Service Centre for rectification.
- Check the fuel level indicator in the cluster for adequate fuel in the fuel tank. In case the last bar is blinking continuously, it indicates low fuel level in the tank. Please re-fuel immediately.
- Don't run the vehicle in low fuel condition in longer duration, which may damage the fuel pump.




STARTING

- Disengage clutch by pulling in the clutch lever and hold it in depressed condition.



- Push and hold electric start switch until engine starts for a maximum of 5 seconds.



NOTE

In case the engine does not start within 5 second, release starter switch and wait for about 5 second before attempting to start the engine again.

In case vehicle not starting on multiple continuous attempts, please turn "OFF" and turn "ON" ignition switch and then start again.

PRECAUTIONS

- Vehicle may start with side stand in ON condition but will turn-off when gear is engaged, this side stand cut-off feature is provided for rider safety
- Ensure side stand is removed before vehicle moving / starting.

STARTING

CAUTION

- If the engine does not start. DO NOT hold the starter switch in depressed condition for long periods, this will cause the battery to drain below the threshold level of 10 volt. Please get the motorcycle checked through an Royal Enfield Authorised Service Centre to identify and correct the reason for not starting.
- NEVER accelerate as soon as the engine starts, especially in cold condition. The engine should be allowed to run in idle RPM for at least 2 minute for the engine oil to circulate and lubricate all the internal moving parts and for the engine temperature to raise. Failure to adhere to this important information will cause serious damage to the engine internals.
- Accelerate only after the idling RPM has stabilised and it is consistent.
- Ensure side stand is in fully retracted position. Failure to do so will cause the engine to switch "OFF" as soon as gear is engaged.

STARTING



WARNING

Please exercise extreme care while riding the motorcycle. Failure to do so can result in an accident causing injury to you or to other road users / passerby.

- Ensure Gear is in Neutral position and the Neutral lamp is glowing in the speedometer. To shift into neutral, move the motorcycle back and forth gently, while simultaneously shifting the gear.

CAUTION


Do not attempt to shift gears without moving the motorcycle back and forth as it will damage the gears mechanism.

- Depress and hold the Clutch Lever.

- Press starter button and hold till engine

starts. Do not release the button before engine starts.

- Do not press the starter button more than 5 sec. After three successive cranking, wait for 15 to 20 sec. battery to recover.



GEAR SHIFTING, RIDING AND STOPPING

- Warm up engine for 2 minutes - till idling is consistent / stable.

GEAR SHIFT PATTERN


1--N--2--3--4--5

- Press clutch lever towards the hand grip.
- Press gear pedal with toe towards down to engage 1st gear.
- Gently open throttle and release clutch simultaneously. If clutch is released suddenly, the engine may stall and cause a jerky start.
- It is recommended to use half clutch condition when commuting in the city traffic condition alone (Engine RPM around idling to 2000 RPM) at 1st gear condition. In other gears and higher

RPM avoid using half clutch which will proportionately reduce the clutch life. During acceleration / deceleration disengage the clutch completely, shift the gear and engage the clutch.

CAUTION

The clutch must be fully disengaged before attempting a gear shift. Failure to fully disengage the clutch may cause a jerky start or stalling the engine besides causing damage to transmission parts.



GEAR SHIFTING, RIDING AND STOPPING

- Press the gear pedal either upward with toe or downward with heel to engage 2nd gear.
- Follow the same procedure for 3rd, 4th and 5th gear.


NOTE

Always start motorcycle with gear in neutral position.

Always move the motorcycle in first gear position only.

When engine speed decreases or while climbing a gradient or running at a reduced speed, shift to the appropriate lower gear to prevent the engine from stalling or straining to pull.

The clutch lever must be fully depressed before attempting a gear shift. Failure to fully depress the clutch lever will cause a roughstart or stalling of the engine besides causing damage to transmission parts.



- When the vehicle is in Neutral position, press gear shift lever down with toe to engage 1st gear.

GEAR SHIFT PATTERN

1 -- N -- 2 -- 3 -- 4 -- 5

GEAR SHIFTING, RIDING AND STOPPING

Recommended up shift speeds			Recommended downshift speeds		
Gear Change	Kmph	Unit to Miles per hour (Mph)	Gear Change	Kmph	Unit to Miles per hour (Mph)
1st - 2nd	20	12.4	5th - 4th	50	31.1
2nd - 3rd	30	18.6	4th - 3rd	35	21.7
3rd - 4th	40	24.8	3rd - 2nd	25	15.5
4th - 5th	55	34.2	2nd - 1st	15	9.3

GEAR SHIFTING, RIDING AND STOPPING

CAUTION

- If the clutch lever is released abruptly and throttle opening is done insufficiently the motorcycle will have a rough start and cause the engine to stall.
- If the acceleration is very high and clutch lever is released abruptly, it will cause motorcycle to move suddenly, which will lead to loss of control leading to an accident resulting in injury and or loss of life to rider / other road users / passed by, besides damage to the motorcycle.
- Always exercise utmost caution while releasing clutch and riding the motorcycle.
- Press the gear pedal either upward with toe or downward with heel to shift subsequent gears.

GEAR SHIFTING, RIDING AND STOPPING

NOTE

Always start motorcycle with the gear in neutral position.

When the engine speed decreases or while climbing a gradient or running at a reduced speed, shift to the appropriate lower gear to prevent the engine from stalling or straining to pull.


- Always shift to lower gears as appropriate whenever slowing down to stop the vehicle.
- Shift gears to neutral position just before bringing the vehicle to a complete stop always.

- Close throttle fully and release the clutch lever slowly ensuring the motorcycle is in neutral position and neutral lamp is glowing.
- Stop the motorcycle in a safe place, turn "OFF" ignition and switch "OFF" engine kill switch.

PARKING


PARKING MOTORCYCLE ON CENTER STAND

- Select a firm, flat surface.
- Hold handle bar straight.
- Lower center stand and ensure that both the legs of the stand are resting evenly on firm ground.
- Apply pressure on the fulcrum lever on the center stand and pull motorcycle backwards, gently.



PARKING MOTORCYCLE ON SIDE STAND

- Select a firm, flat surface.
- Lower side stand and gently tilt motorcycle to the left till it rests firmly.




WARNING

Always park the motorcycle on a firm and flat surface. Parking in a soft ground may cause stand to sink and the motorcycle to fall, causing injury to you or to others and damage to the motorcycle parts.

TOOLS KIT

The tool kit is located in the right side panel of the motorcycle.

S.No.	Description	Qty.
1	Allen Key 6 mm	1
2	Fuse Puller	1
3	Tool Spark Plug (8x16 Box Spanner)	1
4	Ring Spanner 24x14 -24 (Eye Wrench) x 14 (Open End) Combination	1
5	Open End Spanner 17x13	1
6	D/E Spanner 10x12	1
7	Screw Driver 06x120/135	1
8	C-Spanner	1
9	Extension Tube 28x7 & 24x14	1

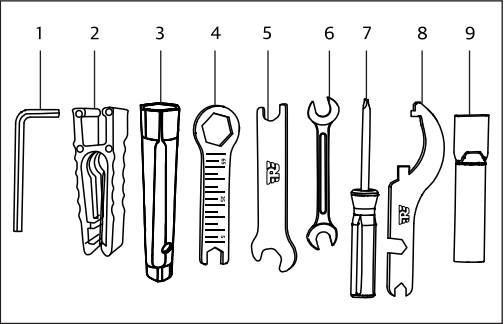

MINOR MAINTENANCE TIPS

The following simple maintenance activities will help in maintaining your motorcycle. However for an elaborate maintenance, we recommend you to get in touch with a Royal Enfield Authorised Dealer / Service Centre.


CONTROL CABLES

Lubricate after water washing motorcycle or if used during rainy conditions.

HAND LEVER PIVOTS

Wipe the area free of dirt / grease.

Apply a few drops of oil on the pivots.




CENTER / SIDE STAND PIVOTS

Apply a few drops of oil on the pivots after cleaning the area of dirt.

MINOR MAINTENANCE TIPS

OIL LEVEL INSPECTION

- Ensure vehicle is in center stand.
- Switch on the engine and gently raise the RPM for 10 seconds.
- Leave the vehicle in idling condition for 15 seconds.
- Switch off the engine & wait for the oil to settle down (Approx. 1 to 2 minutes).
- Engine oil level should be max level.



- In case of oil level is not as max condition, then top up oil to "MAX" condition and repeat the procedure as mentioned above.
- Always use recommended engine oil only.

CAUTION


- Use of wrong grade or spurious oil can seriously affect motorcycle performance & damage to moving parts.
- Do not check the engine oil level in cold condition.
- Do not sit on the vehicle while engine oil inspection.
- Do not inspect the oil level window immediately working up allow it to settle properly.
- Do not overfill the engine oil above "MAX".

MINOR MAINTENANCE TIPS

DRIVE CHAIN

Clean the drive chain carefully. Apply chain lubricant while simultaneously rotating the rear wheel. Wipe off the excess lubricant.

- Ensure the motorcycle is in upright on a firm and flat surface.
- Hold the spindle from the LH with a screw driver and loosen the spindle nut with a 24 mm ring spanner and loosen the LH & RH Chain Adjuster by using 6 mm Allen key.



- Align the line mark in the adjuster and swing arm in both the sides & Set the drive chain free play for 25 to 30 mm by using steel rule.
- Tighten the LH & RH chain adjusters in the swing arm using a 6 mm allen key.
- Tighten the spindle nut fully.
- Ensure the chain tension should be 25 to 30 mm using a ruler / scale.



WARNING

Chain slackness beyond 30 mm will lead to chain slippage.

Maintain drive chain slackness within the specified limits at every 500 kms interval.

Please check the front and rear wheels are correctly aligned, after the chain adjustment.

MINOR MAINTENANCE TIPS

SPARK PLUG

CLEANING AND ADJUSTING PLUG GAP


- Remove the spark plug cap from the spark plug.
- Remove spark plug using the plug spanner and tommy bar.
- Clean the insulator tip and electrodes of the plug carefully.
- Check and set the electrode gap between 0.70 to 0.80 mm.
- Refit the spark plug on the cylinder head and refit the spark plug cap on the spark plug.

CAUTION

- Ensure ignition & kill switch are in off condition before accessing the spark plug.
- Before opening the spark plug blow away the dust in surrounding area to prevent it falling inside cylinder head.
- Ensure spark plug is being replaced with recommended specification only.

MINOR MAINTENANCE TIPS


CHECKING BRAKE FLUID



Front Brake

Place your motorcycle in an upright position on a firm, level surface.

Front : Check that the brake fluid reservoir is horizontal and that the fluid level is above middle of the oil window. Oil window middle to be considered as "Min" mark.



Rear Brake

Rear : Check that the brake fluid reservoir is horizontal and that the fluid level is between the "Max" level and "Min" level marks.

CAUTION

Brake fluid is highly corrosive and can cause damage to painted parts. Please ensure that brake fluid does not spill on any part of the motorcycle. In the event of a spill, please clean the area immediately with a soft cloth (preferably a wet cloth) to avoid damage.

DONOT mix DOT 4& other brake fluid together.

MINOR MAINTENANCE TIPS

NOTE

- Clean the filler cap before removing. Use only DOT 4 brake fluid from a sealed container.
- Use only the specified brake fluid; otherwise, the rubber seals may deteriorate, causing leakage.
- Refill with the same type of brake fluid. Adding a brake fluid other than DOT 4 may result in a harmful chemical reaction.
- Be careful that water or dust does not enter the brake fluid reservoir when refilling. Water will significantly lower the boiling point of the fluid and may result in vapor lock and dirt may clog the ABS hydraulic unit valves.




WARNING

- An insufficient brake fluid level will cause the brake system to fail.
- Old brake fluid reduces the braking effect.
- Make sure that brake fluid for the front and rear brake is changed in accordance with the periodic maintenance schedule.
- Keep brake fluid out of the reach of children.
- Do not allow brake fluid to come into contact with the skin, the eyes or clothing.
- Brake fluid is highly corrosive and can cause damage to painted parts. Ensure brake fluid does not spill on any part of the motorcycle, in the event of spill please clean the area immediately with a soft cloth to avoid damage.

MINOR MAINTENANCE TIPS

INSPECTION OF TYRES AND WHEELS

- Inspect the tyres periodically for tread wear, cracks and cuts.



Minimum tread depth :

Front tyre : 1 mm	Rear tyre : 2 mm
-------------------	------------------

- Check and remove stone, splinters, nails or other particles embedded in the tyre treads.
- Periodically inspect wheels for spokes breakage and wheel rim run out.
- Check proper seating of the tyre beading on the rim whenever the tyre is reassembled.

- Use only recommended tyres & tubes, inflated to correct air pressure.

	Front	Rear
Solo	32 PSI	32 PSI
With Pillion	32 PSI	36 PSI



WARNING

- It is recommended to operate the motorcycle with correct tire pressure as under inflated tires may cause tire to overheat and may result in tire damage and may cause injury to the rider.
- It is recommended to use Royal Enfield recommended tire specification in case of replacement of new tires, it is recommended to use the same specification of the tire recommended by Royal Enfield, failure to adhere the same may result in tire damage and may cause injury to the rider.


MINOR MAINTENANCE TIPS

BRAKE PADS

The front and rear brake pads must be checked for wear at the intervals specified in the periodic maintenance chart.


Front : The pads need to be replaced if a brake pad is worn to the indicator.

Rear : The pads need to be replaced if a brake pad is worn to the indicator.




Royal Enfield has provided your new motorcycle with the optimum brake pad friction material available. It gives the best performance under dry, wet and high operating temperature conditions.

Please note that during some braking conditions you may experience noise, this is normal for this friction material.



MINOR MAINTENANCE TIPS

BATTERY AND MAINTENANCE

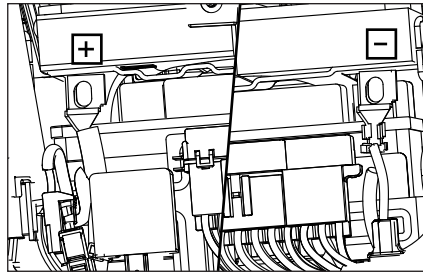

- The motorcycle is provided with 12V - 8 AH VRLA battery.
- The battery must be periodically checked for cleanliness and corrosion free terminals.

NOTE

The poor contact or loose fitments of battery terminals may cause electrical / electronic parts failure.

MINOR MAINTENANCE TIPS


CAUTION

- The battery must be periodically checked for cleanliness and corrosion free terminals.
- The poor contact or loose fitment of battery terminals may cause electrical / electronic parts failure.
- Always disconnect the black negative (-ve) battery cable first and then the red positive (+ve) cable while removing the battery connections.
- For checking the battery voltage check with multi-meter in Voltage mode or contact Royal Enfield Authorised Service Centre or battery service centre.
- Clean the wire terminals free from corrosion and keep the terminals coated with petroleum jelly.
- Keep the (+ve) positive terminal and (-ve) negative terminal cables firmly connected to the respective battery terminals. Failure to do so may result in damage to the motorcycle electrical system.

MINOR MAINTENANCE TIPS

HEADLIGHT BEAM ADJUSTMENT


- The headlight beam focus can be adjusted in vertical direction by using the adjusting screw by turning clockwise or anticlockwise direction.
- The adjusting screw is used to increase or decrease the height of the headlight beam in



vertical direction only. This may be required to increase the visibility and to help prevent the other riders / vehicles passing nearby.

MINOR MAINTENANCE TIPS

Fuse & Fuse carrier located in RH side cover.

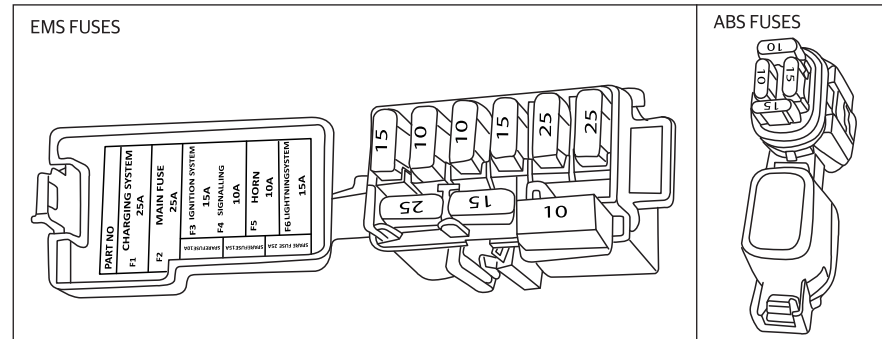

MINOR MAINTENANCE TIPS

MINI BLADE FUSE USAGE LIST

Fuse ID Number	Color	Rating	Remarks
1	W	25 A	Charging System
2	W	25 A	Main Fuse
3	B	15 A	Ignition System
4	R	10 A	Signaling Fuse
5	R	10 A	Horn Fuse

Fuse ID Number	Color	Rating	Remarks
6	B	15 A	Lighting System
ABS Fuse List			
1	B	15 A	ABS Fuse
8	R	10 A	ABS Fuse




WARNING

Please get the electrical system of your motorcycle checked thoroughly and get the faults corrected immediately after experiencing any fuse failure. Failure to do so may result in repeated fuse failure.

Usage of fuses other than specified rating or usage of any other conductive materials or low grade fuses will damage the complete electrical system.

REAR SUSPENSION SETTING

- Rest the motorcycle on center stand.
- Ensure the tire pressure is at recommended specification.
- Ensure adjuster are clear of all dirt and debris before adjusting, if they have dirt or debris please clean it suitably before adjusting.
- The adjuster is a 6 step adjuster and it is kept at first notch position.




- Adjust shock preload by rotating the adjuster clockwise using C-Spanner to INCREASE the preload.
- Adjust shock preload by rotating anti-clockwise using C-Spanner to decrease preload (to make it to first notch position).
- Make the same adjustments on both sides, uneven adjustment may lead to discomfort to the rider.

REAR SUSPENSION SETTING

NOTE

- Adjusting the suspension requires a C-spanner. It is recommended to use the C-spanner that is given in your vehicle tool kit. Extension tube to be used for leverage purposes.
- The best spring preload setting is achieved when it is set for the weight of the rider and that of any luggage and a passenger.



- We recommend to increase the preload and keep it at final notch for fully loaded (GVW condition), thus ensuring an ideal compromise between handling and stability.

REAR SUSPENSION SETTING

Condition	Max Reference Payload	Suspension Setting Notch	Tyre Pressure (PSI)	
			Front	Rear
Unladen / One up Loading / Rider only.	Rider upto 90 kg	1st	32	32
Laden / Two up / Rider + Pillions / Rider + Pillion + Accessories	Upto a maximum of 180 kg payload (Inc of rider weight, pillion weight and accessories)	6th	32	36

*Ensure the preload is set equally on the LH and RH rear suspension.

LONG TRIP PRECAUTIONS

CHECKS PRIOR TO THE COMMENCEMENT OF A LONG JOURNEY

- Service the motorcycle at Royal Enfield Authorised Service Centre.
- Ensure sufficient quantity of fuel is always available in the fuel tank for the journey planned.
- Check and correct tyre pressure if necessary.

CHECKS AFTER EVERY 1000 KMS OF RUN

- Any loose fasteners.
- Condition of the tyres.
- Correct oil level in engine.

- Working of all lights and horn.
- Proper drive chain tension.
- Clutch cable free play.

ITEMS TO BE CARRIED

- Tools kit.
- Bulbs for headlight, trafficator light and fuse.
- Accelerator and clutch cables.
- Spark plug, spark plug cap, fuel hose.

WASHING PROCEDURE

PRECAUTIONS

- Remove ignition key and seal the ignition key barrel slot using adhesive tape.
- Please remove tool kit, first aid kit and other relevant documents if any inside the right side panel before proceeding for washing of the motorcycle.
- Cover the silencer tail pipe, horn and control switches with suitable plastic bags and tie it firmly to prevent water entry.
- Wash the motorcycle only when the engine is in cold condition.
- Do not remove side panel while washing to avoid water entry.
- Brush engine area with a recommend non corrosive solvent to remove dirt or grease.
- Use low pressure water jet to clean.
- Never spray water with great force on head lamp, meter / cluster unit, flasher lights, front and rear wheel hubs, electrical connections and wires, control cables, EFI components, spark plug, battery, side panels.
- Do not use high pressure washers or steam jet cleaners near the seal of headstock bearing or steering stem bearing, seal of wheel bearing, brake calipers, air intakes & exhaust outlets.
- Do not apply any corrosive solvent on painted surfaces or rubber parts.

WASHING PROCEDURE

- Use lukewarm water and mild detergent on the painted components to remove dirt, etc.
- Clean motorcycle thoroughly with plain water to remove the detergent.
- Never spray water towards bottom side of instrument cluster directly to avoid water entry through breather holes.
- If possible, use compressed air and blow off water particles from the obscure areas of the motorcycle, electrical connections etc.
- Once the motorcycle has been ridden in salty conditions (i.e. during winter in places where road salt is used) or near coastal areas it is recommended to wash your motorcycle with cold water after the ride to prevent corrosion or rust build-up. Please do not use warm water for washing as it may damage the motorcycle due to chemical reaction with the salt. After washing process once the motorcycle is completely dry it is recommended to apply anti corrosion spray on all the metal and chrome plated areas to protect the parts from corrosion.
- It is recommended not to apply the anti-corrosion spray on the brake discs.
- Do not use petrol, Brake Oil or other flammable liquids to clean or wash on electronics parts.
- The parts chosen using motorcycle configurator should not be washed with soap or chemical, use only with plain water.

WASHING PROCEDURE

AFTER WASHING

- Ensure, the motorcycle is thoroughly dry by wiping with a clean soft lint free absorbent cloth or chamois leather.
- Remove all adhesive tapes.
- Lubricate control cables, pivots for footrest, side stand, center stand, brake and gear shifter linkages, drive chain etc. with lube oil.
- Polish the painted and plated surfaces using recommended automobile polishing wax.
- Start the engine and allow to run at an idling speed for a few minutes to warm up engine.
- Drive the motorcycle slowly, apply both the brakes intermittently to dry up the water in brake pads.
- Please clean / wipe out water spills completely inside the RH side panel before keeping tool kit, first aid kit and other relevant documents inside the right side panel.

STORAGE PRECAUTIONS

In-case your motorcycle is not going to be used for a month or more, the following precautions should be taken.

- Get the motorcycle serviced through a Royal Enfield Authorised Service Centre.
- Drain the fuel completely from the fuel tank and induction system.
- Remove spark plug. Pour in about 5ml of clean engine oil through spark plug hole. Close the hole and crank engine several times and refit spark plug.
- Clean drive chain thoroughly and apply Royal Enfield recommended chain lubricant.
- Wipe off excess lubricant after 5 minutes of application.
- Remove charging circuit fuse from the fuse box.
- Store the battery in a cool, dry and well ventilated place.
- Cover the silencer with suitable bags to prevent moisture entry. Set the motorcycle on its center stand.
- Apply anti rust solutions on all plated parts. Take care not to apply this solution on chrome, rubber or painted parts. Store motorcycle in a clean covered area free of moisture and dust.
- For re-use after storage, it is preferable to get the motorcycle prepared through a Royal Enfield Authorised Service Centre to ensure the motorcycle is restored to its peak operating conditions.
- Battery +ve connector can be disconnected to avoid battery drain issue in long term.

ENVIRONMENT CARE

BE AN ENVIRONMENTALLY CONSCIOUS RIDER

You've ridden through some beautiful places on your Royal Enfield. Won't you like to keep them that way? Here are some tips to help you keep those places unspoilt so that others can enjoy them too:

Engine Oil

While your liquid waste like engine oil, gasoline, coolant and other cleaning solvents need to be regularly replaced, what happens to them? Make sure they are not dumped in the soil, down the sewers, drains, lakes or rivers around you. The simplest way to do it is to have them drained into a container which you can hand over to your local recycling agent or at your nearest Royal Enfield service centre. They will follow the guidelines laid down by the local authorities to get rid of it.

Battery

If your Royal Enfield's battery needs to be replaced, hand it over to an authorised recycling agent or Royal Enfield service centre. They will follow the guidelines laid down by the local authorities to get rid of it. This will ensure the dangerous substances from which the battery has been manufactured do not pollute the environment.

ENVIRONMENT CARE

Tyre(s) / Plastic / Electrical / Electronic parts / Oil Filter

If your Royal Enfield's tyre(s) / plastic / electrical / electronic part(s) / oil filter need to be replaced make sure you hand them over to an authorised recycling agent or a Royal Enfield service centre. They will follow the local authority's guidelines to get rid of them in an environmentally friendly manner.

Cleaning your Royal Enfield

Avoid aerosol sprays; instead, use a biodegradable detergent or dry wash to wash your Royal Enfield. Also, be cautious while discarding the cleaning solvents. Hand them over to an authorised recycling agent or a Royal Enfield service centre. They will follow the local authority's guidelines to get rid of them in an environmentally friendly manner.

This note does not constitute legal advice; please contact your local authorities or your nearest Royal Enfield Service Centre for further guidance.

PERIODICAL MAINTENANCE

The maintenance schedule detailed here will help you maintain your METEOR 350 motorcycle meticulously and to get a long trouble free service. The schedule provided herein is based upon average riding conditions and indicates the kms. at which regular inspections, adjustments, replacements and lubrications are to be carried out. The frequency of the maintenance must be shortened depending upon the severity of the driving condition or if the motorcycle is used in a very dusty environment. Contact the nearest Royal Enfield Authorised Dealer / Service Centre for expert advice and to carry out the required maintenance.

Sl. No.	DESCRIPTION	PERIODICAL MAINTENANCE													
	Kms (x 1000)	0.5	5	10	15	20	25	30	35	40	45	50			
	Months	1.5	6	12	18	24	30	36	42	48	54	60			
	Miles (x 1000)	0.3	3	6	9	12	15	18	21	24	27	30			
1	Engine oil (level check / replace)	R	I	R	I	R	I	R	I	R	I	R			
	Check level at every 1000 kms. or earlier and topup as required														
2	Engine oil filter element	R		R		R		R		R		R			

A : Adjust C : Clean D : De-carbonise I : Inspect (Clean, Adjust, Lubricate or replace if necessary)
 L : Lubricate R : Replace

PERIODICAL MAINTENANCE

Sl. No.	DESCRIPTION	PERIODICAL MAINTENANCE													
		Kms (x 1000)	0.5	5	10	15	20	25	30	35	40	45	50		
		Months	1.5	6	12	18	24	30	36	42	48	54	60		
	Miles (x 1000)	0.3	3	6	9	12	15	18	21	24	27	30			
3	Engine oil strainer on crankcase LH	C		C		C		C		C		C			
4	Inlet / exhaust tappet setting	I&A		I&A		I&A		I&A		I&A		I&A			
5	Rubber hose-intake adapter	I	I	I	I	I	I	I	I	I	I	I	I		
6	Evaporative emission equipment rubber hoses & drain the overfilled by removing plug.	I	I	I	I	I	I	I	I	R	I	I			
7	Spark plug			C&A		R		C&A		R		C&A			
8	HT lead for crack	I	I	I	I	I	I	I	I	I	I	I	I		
9	Air filter element	C	C	R	C	R	C	R	C	R	C	R	C		
		Clean/replace more frequently if operated in dusty condition													

A : Adjust C : Clean D : De-carbonise I : Inspect (Clean, Adjust, Lubricate or replace if necessary)
L : Lubricate R : Replace

PERIODICAL MAINTENANCE

Sl. No.	DESCRIPTION	PERIODICAL MAINTENANCE												
	Kms (x 1000)	0.5	5	10	15	20	25	30	35	40	45	50		
	Months	1.5	6	12	18	24	30	36	42	48	54	60		
	Miles (x 1000)	0.3	3	6	9	12	15	18	21	24	27	30		
10	Vent pipe under air filter box	I	I	I	I	I	I	I	I	I	I	I	I	
11	Starter motor & starter relay connections	I	I	I	I	I	I	I	I	I	I	I	I	
12	Battery terminals (apply petroleum jelly)	C	C	C	C	C	C	C	C	C	C	C	C	
13	Earth wire eyelet contact					I							I	
14	Injector hose	I	I	I	I	I	I	I	I	I	I	I	I	
15	Fuel filter in fuel pump							R						
16	Front fork oil	I	I	I	I	R	I	I	I	R	I	I	I	
17	Steering ball races play	Inspect & adjust, if required lubricate for every 5000 kms. or earlier as required. Replace if necessary												

A : Adjust C : Clean D : De-carbonise I : Inspect (Clean, Adjust, Lubricate or replace if necessary)
 L : Lubricate R : Replace

PERIODICAL MAINTENANCE

Sl. No.	DESCRIPTION	PERIODICAL MAINTENANCE											
	Kms (x 1000)	0.5	5	10	15	20	25	30	35	40	45	50	
	Months	1.5	6	12	18	24	30	36	42	48	54	60	
	Miles (x 1000)	0.3	3	6	9	12	15	18	21	24	27	30	
18	Wheel rim run out front & rear	I		I		I		I		I		I	
19	Swing arm pivot bush & spacer	I	Inspect & if required lubricate for every 5000 kms. or earlier as required. Replace if necessary										
20	Tyre wear pattern (front & rear)	I	I	I	I	I	I	I	I	I	I	I	I
21	Rear wheel drive chain	Clean, lubricate every 1000 kms. / clean, lubricate & adjust every 5000 kms. or earlier as required											
22	Rear wheel cush drive rubbers					I & R				I & R			
23	Front & rear brake hose & banjo bolt	I	I	I	I	I	I	I	I	I	I	I	I
24	Brake fluid level, front & rear disc	I	I	I	I	R	I	I	I	R	I	I	I

A : Adjust C : Clean D : De-carbonise I : Inspect (Clean, Adjust, Lubricate or replace if necessary)
L : Lubricate R : Replace

PERIODICAL MAINTENANCE

Sl. No.	DESCRIPTION	PERIODICAL MAINTENANCE											
	Kms (x 1000)	0.5	5	10	15	20	25	30	35	40	45	50	
	Months	1.5	6	12	18	24	30	36	42	48	54	60	
	Miles (x 1000)	0.3	3	6	9	12	15	18	21	24	27	30	
25	Clutch lever / cable free play	Adjust every 1000 kms. or earlier as required & replace if required.											
26	Hand levers & foot levers	Lubricate every 1000 kms. or earlier as required											
27	Pivot-side stand, center stand, pillion foot rest, gear shifter, brake pedal, levers	L	L	L	L	L	L	L	L	L	L	L	
28	Throttle cable	Adjust every 5000 kms. or earlier if required.											
29	Brake pads - front & rear	I	I	I	I	I	I	I	I	I	I	I	
30	Side stand switch operation	I	I	I	I	I	I	I	I	I	I	I	
31	All mounting fasteners in vehicle for tightness	I	I	I	I	I	I	I	I	I	I	I	

A : Adjust C : Clean D : De-carbonise I : Inspect (Clean, Adjust, Lubricate or replace if necessary)
L : Lubricate R : Replace

PERIODICAL MAINTENANCE

Sl. No.	DESCRIPTION	PERIODICAL MAINTENANCE													
	Kms (x 1000)	0.5	5	10	15	20	25	30	35	40	45	50			
	Months	1.5	6	12	18	24	30	36	42	48	54	60			
	Miles (x 1000)	0.3	3	6	9	12	15	18	21	24	27	30			
32	Throttle body - cleaning	Throttle body should be removed from the vehicle and cleaned with a dry microfibre cloth, usage of throttle body cleaners or any similar solvent or alcohol based liquids for cleaning is strictly prohibited, Throttle body cleaning every 10000 kms / 12 months or earlier as required.													

A : Adjust C : Clean D : De-carbonise I : Inspect (Clean, Adjust, Lubricate or replace if necessary)
L : Lubricate R : Replace

The maintenance schedule detailed here will help you to maintain your Royal Enfield motorcycle meticulously and to get a long trouble free service. The frequency of the maintenance must be shortened depending upon the severity of the driving condition or if the motorcycle is used in a very dusty environment, severe climatic cold and hot conditions, bad roads, stagnant water etc., Contact a nearest Royal Enfield Authorised Dealer / Service Centre for expert advice and to carry out the periodical maintenance.

NOTE

For maintenance after 50,000 kms, please repeat the same frequency levels specified above, in consultation with a Royal Enfield Authorised Dealer / Service Centre.

WARRANTY TERMS AND CONDITIONS

Royal Enfield warrants its motorcycle to be free from manufacturing and materials defects, under normal use subject to the following conditions.

1. Warranty shall be in force until the expiry of a period of 36 months from the first date of sale to the first customer and to any subsequent owners for the balance of the remaining period, until expiry of 36 months from the date of first sale / registration of the motorcycle.
2. In order to effect Warranty, it is a prerequisite that the maintenance schedule prescribed by Royal Enfield in this Owner's manual and warranty repairs if any, has been carried out at the Authorised Distributor's service facility OR at their Authorised dealership's service facility.
3. Record of all the regular services and periodical maintenance that have been carried out, along with proof of service history will be required to be verified by the Authorised Distributor's service facility OR their Authorised dealership's service facility prior to carrying out a warranty service.
4. Proof of Ownership, in the form of Sales Registration OR Proof of Purchase documentation of the motorcycle, clearly mentioning the Engine and VIN numbers, must be provided to the Distributor's service facility OR their Authorised dealership's service facility.

WARRANTY TERMS AND CONDITIONS

5. During the warranty period, Royal Enfield's obligation is limited to repair or replacing free of charge, such part or parts of the motorcycle which in examination shall be deemed defective in the opinion of Royal Enfield and / or their distributors / authorised dealers. Such defective part/s, which has been replaced, shall become the property of Royal Enfield.
6. Cost of Consumables like fuel, oils etc, labour, shipping charges of replacement parts for any warranty replacement are chargeable to the customer.
7. Warranty is not applicable for the following parts:
 - Normal ageing of parts like rubber parts, tyres and tubes, hand grips, glass, plastic, soft items like seat rexene, cushion etc.
 - Dullness of chrome plated parts, discolourisation of chromed exhaust pipe / silencer, buffed parts, painted surfaces etc.
 - Normal wear and tear items such as control cables, brake pads / shoes, clutch etc.
 - Electrical items like bulbs, wiring harness, switches, battery, fuses, electric start motor etc.

WARRANTY TERMS AND CONDITIONS

8. Warranty will become void under the following conditions:
- Damages due to lack of proper maintenance, periodic services not carried out as per Royal Enfield recommendation etc.
 - Damages caused by any unauthorised repairs carried out in any part of the motorcycle.
 - Failures occurred due to use of non recommended grade lubricants, fuel or improper level.
 - Use of non genuine Royal Enfield parts.
 - Damages caused due to unauthorised alterations to any part of the motorcycle.
 - Use of accessories not supplied by Royal Enfield.
 - Motorcycle fitted with side cars.
 - Motorcycle used in rallies, off road, dirt track, races etc.
 - Motorcycle involved in accidents, collisions etc.
 - Damages that occur due to extreme operating conditions beyond the limitation or specifications as given by Royal Enfield, such as maximum load carrying capacity, engine speed etc.
 - Damages that occur due to long / improper storage, transportation of motorcycle etc.

WARRANTY TERMS AND CONDITIONS

9. Royal Enfield reserves the right to finally decide on all warranty claims.
10. Royal Enfield reserves the right to make changes in the motorcycle without any obligation to install these changes on previously sold motorcycle.
11. Royal Enfield authorised distributors and / or their dealers are independently owned and operated. They may hence deal with other aftermarket products for which Royal Enfield is not responsible for the performance, safety, quality, reliability and suitability of such products. Defects, if any in such parts OR that may arise in the motorcycle due to use of such parts is not liable to be covered by Royal Enfield and may render this warranty void.
12. There is no other express OR implied warranty in the motorcycle. Any implied warranty of merchantability or fitness is limited to the duration of this warranty.
13. To the fullest extent allowed by law, Royal Enfield and its authorised distributors and / or dealers shall not be liable for loss of use, inconvenience, loss of time, commercial losses or other incidental or consequential damages.

EMISSION WARRANTY

This emission warranty is valid for 30,000 Kms / 3 years from the date of first sale whichever earlier, to the first customer and is in addition to and parallel to the warranty policy, conditions and obligations laid down in the Owner's Manual.

Royal Enfield further warrants that if on examination by its Royal Enfield Authorised Service Centre, the motorcycle fails to meet the specified emission standards, then the Authorised Service Centre shall take necessary corrective measures and shall, at its sole discretion, repair or replace free of charge components of the emission control system to meet the required emission standards.

The method/s of examination to determine the warranty conditions of the emission warranty related components will be at the sole discretion of Royal Enfield and / or our Authorised Service Centre and results of such examination will be final and binding. If on examination the warranty conditions of the part/s is/are not established, Royal Enfield will have the right to charge all, or part of the cost of such examination to the customer in addition to the cost of the components.

EMISSION WARRANTY

In case of acceptance of the component/s under Emission warranty, Royal Enfield will replace free of charge the component/s as required. However, the consumables like fuel, lubricants, solvents, etc. shall be chargeable to the customer as per actuals.

In case any of the components covered under emission warranty or the associated parts are not independently replaceable. Royal Enfield will have the sole discretion to replace either the entire assembly or parts of the assembly through suitable repairs.

Royal Enfield reserves the right to carry out necessary consequential repairs to the motorcycle or replace any part, in addition to the repair or replacement of the components covered under emission warranty, to establish compliance to in-use emission standards. Such repairs / replacements will be chargeable to the customer.

All parts removed for replacement under warranty will become the property of Royal Enfield.

Royal Enfield will not be responsible for the cost of transportation of the motorcycle to the nearest Authorised

EMISSION WARRANTY

Service Centre or for any loss due to non availability of the motorcycle during the period of examination and repairs by Royal Enfield and / or their Authorised Service Centre.

Royal Enfield will not be responsible for any penalties that may be charged by statutory authorities on account of failure to comply with the in-use emission standards.

The cost incurred to check emission of the motorcycle will have to be borne by the customer.

Emission warranty will be applicable irrespective of the change of ownership of the motorcycle provided all the conditions as laid down in this document are met from the date of original sale of the motorcycle.

EMISSION WARRANTY

THE WARRANTY SHALL APPLY IF THE CUSTOMER

- Observes all the important instructions and any other precautions listed in the owner's manual.
- Under all circumstances uses lubricants and fuel as recommended by Royal Enfield.
- Regularly obtains and carries out maintenance in accordance with Royal Enfield guidelines and enters the details in the Log book.
- Immediately approaches the nearest RE Authorised Dealer / Service Centre upon discovery of failure to comply with the emission standard inspite of having maintained and used the motorcycle in accordance with the instructions in the owner's manual and having carried out such repairs and adjustments as may be required with a view to establish such compliance.
- Production of a valid Pollution Under Control Certificate is necessary to claim Emission Warranty.

EMISSION WARRANTY

- Produces the owner's manual and Log book for verification details.
- Produces receipts covering maintenance of the motorcycle is specified in the owner's manual from the date of original purchase of the motorcycle.
- Produces valid certificate of Insurance and RTO Registration Certificate (R.C. Book).

THE EMISSION WARRANTY SHALL NOT APPLY IF

- A valid "Pollution under control" certificate is not produced.
- The motorcycle is not serviced by RE Authorised Dealer / Service Centre as per the service schedule described in the maintenance chart.
- The motorcycle has been subjected to abnormal use, abuse, neglect and improper maintenance or has met with an accident.

EMISSION WARRANTY

- Replacement parts not specified and approved by Royal Enfield have been used.
- The motorcycle, or parts there of, has been altered, tampered with or modified or replaced in an unauthorised manner.
- The odometer is not functioning or the odometer and / or its reading has been changed / tampered with, so that the actual distance covered cannot be readily determined.
- The motorcycle has been used for competitions, races and rallies or for the purpose of establishing records.
- On examination by Royal Enfield or its Authorised Dealer / Service Centre, if the motorcycle shows that any of the conditions stipulated in the Owner's manual with regard to use and maintenance have been violated.
- The motorcycle has been run on adulterated / leaded fuel or lubricant other than those specified by Royal Enfield in the Owner's manual or any other document given to the customer at the time of sale of the motorcycle.

EMISSION WARRANTY

- The emission related components are tampered with.
- All service and parts related bills and vouchers incurred during the tenure of the emission warranty is not produced.
- All maintenance activities carried out on the motorcycle during the tenure of the emission warranty are not entered in the log book.

TIPS TO BE ON THE RIGHT SIDE OF LAW

- Always get your motorcycle checked to meet the emission regulations through an authorised emission checking centre.
- Always carry a valid "Pollution Under Control" certificate with you, as and if applicable by law.

EMISSION WARRANTY

TIPS TO REDUCE POLLUTION

- Ensure that the periodical maintenance is carried out as stipulated in the owner's manual through a Royal Enfield Authorised Service Centre.
- Use only Unleaded petrol (91 RON or higher) from reputed fuel pumps.
- Ensure the fuel used is not adulterated.
- Use correct spark plug as recommended in the owner's manual.
- Use lubricants as per recommendations given on grade / brand in the owner's manual.

EVAPORATIVE EMISSION CONTROL SYSTEM WARRANTY

The following warranty applies to the evaporative emission control system.

Royal Enfield Motors warrants the first owner and each subsequent owner, that this motorcycle is designed and built so as to conform, at the time of sale, with applicable regulations specified by the evaporative emission control system related parts fitted to this motorcycle are free from defects in materials and workmanship which may cause this motorcycle not to meet applicable regulations period of 24 Months from the date of first use of the motorcycle.

The Warranty period shall begin either on the date the motorcycle is delivered to the first retail purchaser OR from the first date the motorcycle is used as a demonstrator OR as a display and/or trial motorcycle.

THE FOLLOWING ARE NOT COVERED BY THE EVAPORATIVE EMISSION CONTROL SYSTEM WARRANTY

1. Failures which may arise as a result of misuse, alterations, accidents OR non performance of routine maintenance, as specified in the Owner's Manual.
2. Replacing, removing OR modifying any portion of the EVAPORATIVE EMISSION CONTROL SYSTEM (consisting of fuel tank, fuel tank cap, canister, purge valve, throttle body, vapor hoses, fuel hoses and hose connectors) with parts not certified by Royal Enfield.

EVAPORATIVE EMISSION CONTROL SYSTEM WARRANTY

3. Loss of time, inconvenience, loss of motorcycle use or any other consequential loss or damages.
4. Any motorcycle in which the Odometer has been tampered with OR the speedo cable has been disconnected for any reason OR is broken and not replaced immediately, due to which the exact distance covered cannot be determined.
5. Normal aging of parts such as fuel hoses, vapor hoses, gaskets and rubber components.

RECOMMENDATIONS FOR REQUIRED MAINTENANCE

It is recommended that the routine maintenance of the motorcycle be carried out at specified intervals and any maintenance to the evaporative emission control systems should be performed only by an Authorised Royal Enfield Service Centre and using only genuine Royal Enfield spare parts.

WIRING DIAGRAM

Disclaimer : It is recommended that the wiring circuit repair and any other electrical rework should be performed only by an authorized Royal Enfield service centre, failure to adhere this may cause damage to electrical systems and render the warranty of the products as void.



SERVICE / MAINTENANCE RECORD

S.No.	Date	Job Card No.	Kms/ miles	Brief details of work / service	Royal Enfield Authorised Dealer
1.					
2.					
3.					
4.					
5.					
6.					
7.					

SERVICE / MAINTENANCE RECORD

S.No.	Date	Job Card No.	Kms/ miles	Brief details of work / service	Royal Enfield Authorised Dealer
8.					
9.					
10.					
11.					
12.					
13.					
14.					

NOTES



ROYAL ENFIELD

Part No. RAM00316/A

ROYALENFIELD.COM